



Subplate (ISO5781)

Size unit: mm


Size unit: mm

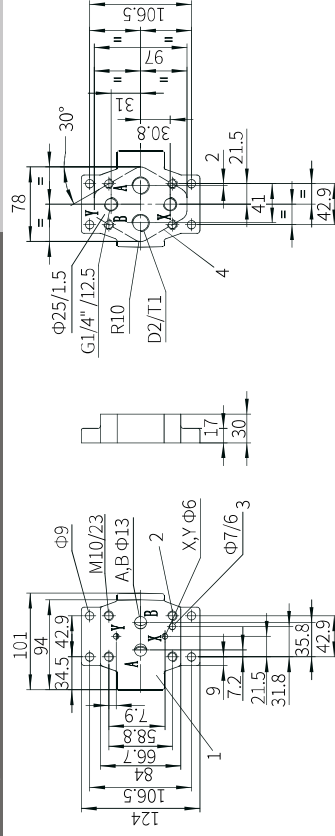

Size	Model	D2	T1	Valve fixing screw	Torque	Weight
10	G460/01	G3/8"	13	4pcs M10×40-10.9 (GB/T70.1-2000)	69Nm	1.7kg
	G460/02	M18×1.5				
	G461/01	G1/2"	16			
	G461/02	M22×1.5				

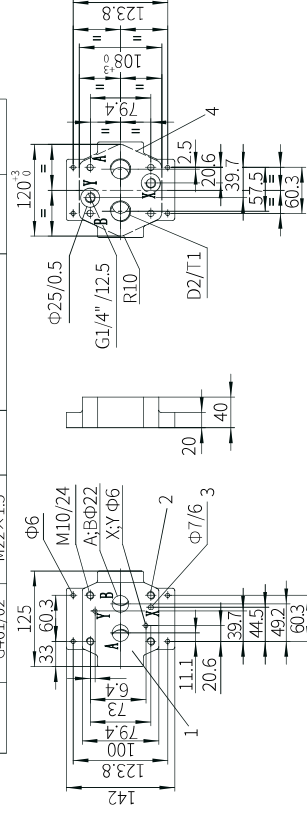


Size	Model	D2	T1	Valve fixing screw	Torque	Weight
25	G412/01	G3/4"	17	4pcs M10×50-10.9 (GB/T70.1-2000)	69Nm	3.3kg
	G412/02	M27×2				
	G413/01	G1"	20			
	G413/02	M33×2				

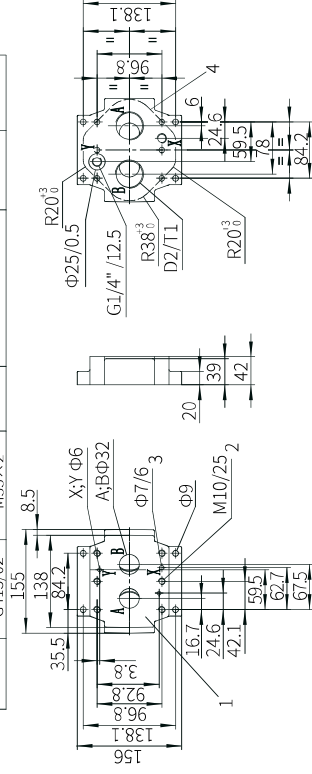


Size	Model	D2	T1	Valve fixing screw	Torque	Weight
32	G414/01	G11/4"	20.5	4pcs M10×60-10.9 (GB/T70.1+2000)	69Nm	5.0kg
	G414/02	M42×2				
	G415/01	G11/2"	22.5			
	G415/02	M48×2				


- 1 Valve mounting face grinding
- 2 Valve fixing screw holes
- 3 Locating pin hole
- 4 Incision outline of subplate

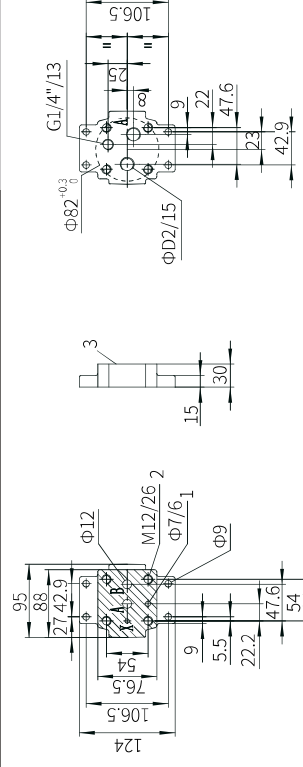

Size	Model	D2	l1	Valve fixing screw	Torque	Weight
10	G545/01	G3/8"	13	4pcs M12 × 50-10.9 (GB/T70.1-2000)	120Nm	1.5kg
	G545/02	M18 × L5				
	G546/01	G1/2"	16			
	G546/02	M22 × L5				

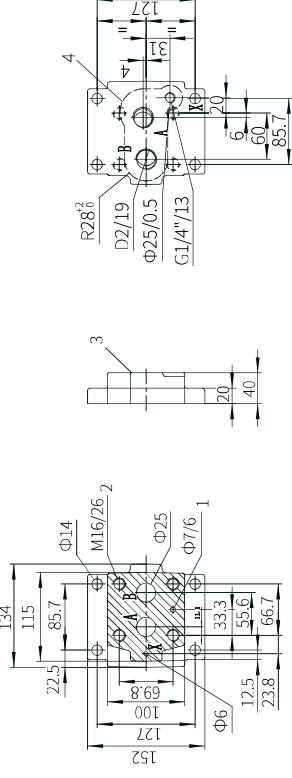

Size	Model	D2	T1	Valve fixing screw	Torque	Weight
25	G408/01	G3/4"	17	4pcs M16×50-10.9 (GB/T70.1-2000)	295N·m	3.0kg
	G408/02	M21×2				
	G409/01	G1"	20			
	G409/02	M33×2				

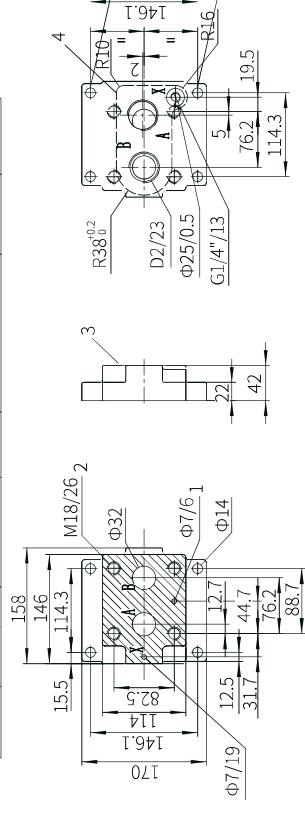

Size	Model	D2	T1	Valve fixing screw	Torque	Weight
32	G410/01	G11/4"	20.5	4pcs M18×50-10.9 (GB/T 70.1-2000)	405Nm	5.0kg
	G410/02	M42×2				
	G411/01	G11/2"	22.5			
	G411/02	M48×2				

- 1 Valve mounting face grinding
- 2 Valve fixing screw holes
- 3 Locating pin hole
- 4 Incision outline of subplate