

Pilot Operated Proportional Relief Valve

Model: (Z)DBE/(Z)DBEE...1XJ



- ◆ Size 6
- ◆ Maximum working pressure 315bar
- ◆ Maximum working flow 30 L/min

Contents

Function description, sectional drawing	02
Models and specifications	03
Functional symbols	04
Technical parameters	04-05
Electrical connections	06
Characteristic curve	07-08
Component size	09-10

Features

- For limiting system pressure
- Operation by proportional solenoids
- Subplate mounting or sandwich plate connection
- Both valves and proportional amplifiers from the same supplier
- Model DBEE and ZDBEE with integrated amplifier:
- Low manufacturing tolerance of the command value–pressure characteristic curve
- The ramp signal generation time can be adjusted separately when the pressure increases or decreases



Any part of this brochure can not be reproduced, edited, copied and disseminated electronically in any way without authorization of Jiayite Hydraulics company. As the product is in constant development and innovation, the information in this brochure is not specific to the special conditions or applicability of a specific industry, thus Jiayite Hydraulics company is not responsible for any incomplete or inaccurate description generated.

Function description, sectional drawing

Model DBE/ZDBE

The DBE and ZDBE proportional relief valves are operated by a proportional solenoid. These valves are used to limit the system pressure. It can adjust the system pressure steplessly to be limited based on the electrical command value.


The valve mainly consists of proportional solenoid (1), valve body (2), valve components (3), valve spool (4) and pilot cone head (8). The proportional solenoid converts the current into mechanical force proportionally. The increase in current intensity correspondingly causes an increase in the magnetic force. The armature cavity of the solenoid is filled with oil and maintains pressure balance.

The system pressure is set by the proportional solenoid (1) according to the command value. The pressure in port P acts on the right side of the valve spool (4). At the same time, the system pressure acts on the spring-loaded side of the valve spool (4) through the control line (6) with orifice (5). The system pressure acts on the pilot cone head (8) through another orifice (7) in relative to the mechanical force of the proportional solenoid (1). When the system pressure reaches the pre-set value, the pilot cone head (8) is lifted from the valve seat. Then the control oil can drain (according to the model) externally via port A(Y) or internally into the tank to limit the pressure on the spring-loaded side of the valve spool (4). If the system pressure continues to increase slightly, the higher pressure on the right will push the valve spool to the left to the control position P to T. At the minimum control current (corresponds to the command value of zero), the minimum setting pressure will be set.


Note:

In order to ensure optimum valve function of the valve, it should be bled when valve used:

- Remove the bleed bolt (9),
- Fill the oil into the screw hole at position 9,
- Re-screw the position 9 when no more bubbles appear.
- It must be avoided the emptying running of the tank. In some installation conditions, a back pressure valve is to be installed (back pressure about 2bar)

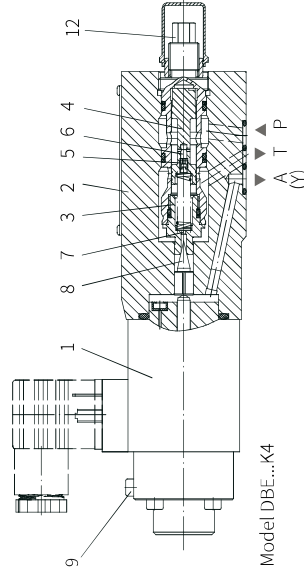

Model DBE...K4

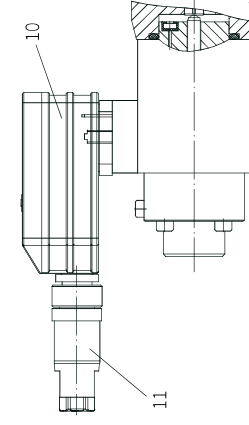


In principle, the function and structure of this valve is similar to the valve DBE and ZDBE, but just take a connector (10) with integrated electronic (OBE) on the proportional solenoid.

Both the supply power and command value voltage are configured on the cable socket (11).

Model DBEE...K31...and ZDBEE...K31...(with integrated electronic OBE)


Models and specifications

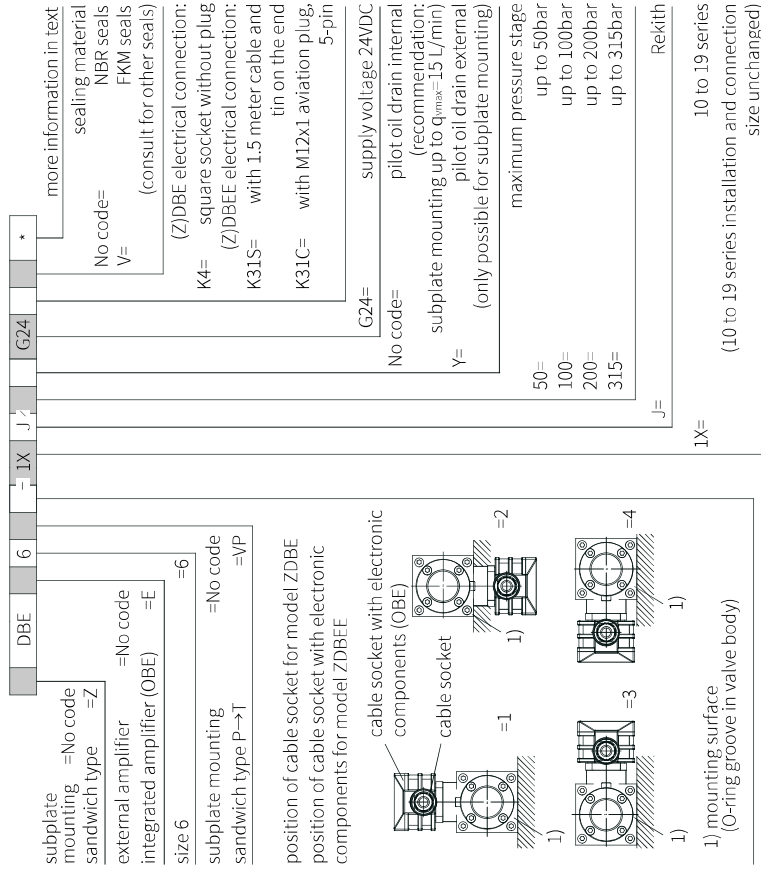


Functional symbols

Symbols for sandwich type valve: (1)= Valve side, (2)= Subplate side)


Model DBE6...




Model DBE6...Y...




Model ZDBE6VP...

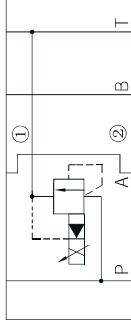


Model DBE6...



Model DBE6...Y...



Model ZDBE6VP...



Technical parameters

Electrical	
Voltage type	V 24VDC
Minimum control current	mA 100
Maximum control current	mA 800 or 1600
Coil resistance	Ω 19.5 (800mA), 5.4 (1600mA)
- Cold value at 20°C	Ω 31 (800mA), 7.8 (1600mA)
- Maximum warm value	
Duty	% 100
Electrical connections	DBE and ZDBE
	With component plug to DINEN 175301-803
	With cable plug to DINEN 175301-803 ²⁾
	DBEE and ZDBEE
	With component plug to DINEN 175201-804
	With cable plug to DINEN 175201-804 ²⁾
Valve protection to EN60529	IP65, plug installed and locked


Technical parameters

Overview	
Weight	DBE and ZDBE kg 2.4
	DBEE and ZDBEE kg 2.5
Installation position	Optional
Storage temperature range	°C -20 to +80
Environment	DBE and ZDBE °C -20 to +70
Temperature range	DBEE and ZDBEE °C -20 to +50
Hydraulic (Measured when using HLP46, ϕ_{oil} =40°C ± 5°C)	
Maximum working pressure	Port P; P1-P2 A1-A2; B1-B2 bar 315
	Port T bar 50
Maximum adjustable pressure	Pressure stage 50 bar 50
	Pressure stage 100 bar 100
	Pressure stage 200 bar 200
	Pressure stage 315 bar 315
Minimum setting pressure at command value zero bar	See characteristic curve on page 8
Return oil pressure at port A; external control oil return (Y)	Separate and at zero pressure to tank
Control oil flow rate	l/min 0.6 to 1.2
Maximum flow	l/min 30
Pressure medium	Mineral oil (HL, HLP) ¹⁾ in accordance with DIN 51524; Fast living organisms degraded oil according to VDMA 24568; HETG (Rapeseed oil) ¹⁾ ; HEPG(Polyethyleneglycol) ²⁾ ; HEES (Synthetic Fats) ²⁾
Oil temperature range	°C -20 to +80
Viscosity range	mm ² /s 15 to 380
The maximum allowable pollution degree of oil to ISO4406(c)	Class 20 / 18 / 15
Hysteresis	% ± 1.5 of the maximum setting pressure
Repeatability	% < ± 2 of the maximum setting pressure
Linearity	% ± 3.5 of the maximum setting pressure
Manufacturing tolerance of command value pressure	DBE and ZDBE % ± 2.5 of the maximum setting pressure
characteristic curve, according to the hysteresis	DBEE and ZDBEE % ± 1.5 of the maximum setting pressure
characteristic curve when pressure increasing.	
Step response Tu+ Tg	10 %→ 90 % ms about 80
	90 %→ 10 % ms about 50
	Dependent on equipment


The oil must meet the cleanliness degree requested by the components in the hydraulic system. Effective oil filtration can prevent failure and increase the service life of the components

Electrical connections


Model (Z) DBE...1XJ/...K4
Plug to DINEN 175301-803

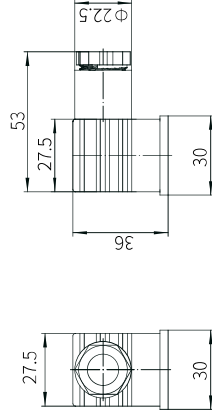


Connection at component plug




Connection at plug-in connector



Model (Z)DBEE...1XJ/...K31S

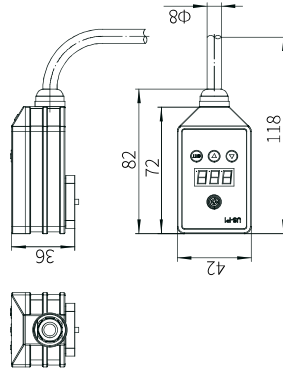


Model (Z)DBEE...1XJ/...K31C

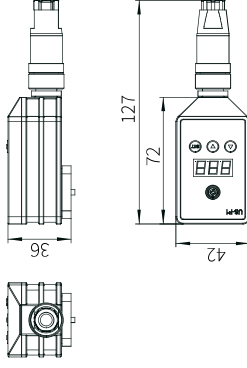


Terminal identification

M12 plug terminal number (K31C type)	Cable color (K31S type)	Terminal identification
1	Red	Power supply+
2	Black	Power supply-/ command value -
3	Yellow	Command value+
4	Blue	Reference voltage 5V
5	Green	-

Connection example:
PLC example input command





Connection example:
Potentiometer input command




Characteristic curve

(Measured when using HLP46, $\theta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$)





Pressure in port P or P2 ($q_v = 5\text{L/min}$) depending on the command value

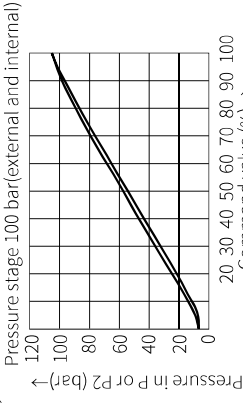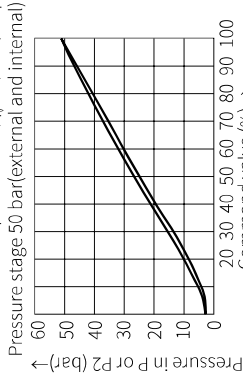

Pressure stage 200 bar (external and internal)

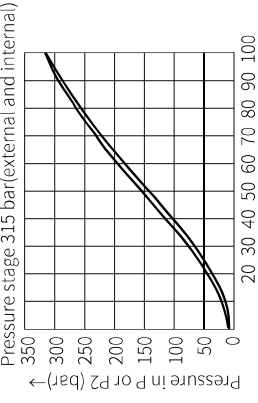

Pressure in port P or P2 depending on the flow q_v

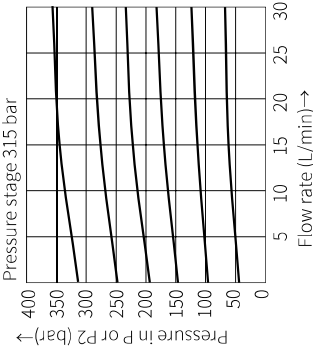

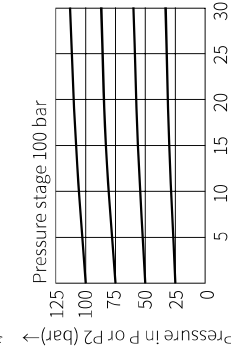



The characteristic curve is measured without back pressure in ports A (external control oil return) and T (internal control oil return). When the internal control oil returns, the pressure in port P or P2 will increase by the outlet pressure value in port T.




Characteristic curve

(Measured when using HLP46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$)

Minimum settable pressure in port P or P2 with command value 0 Control oil return—internal ---external

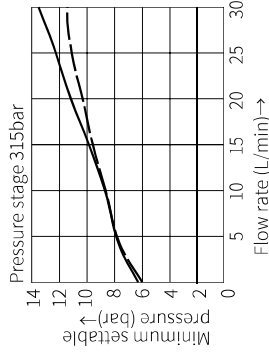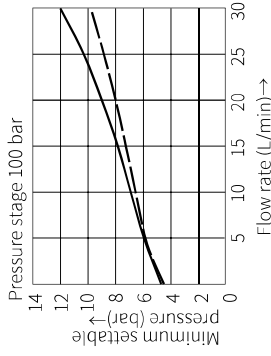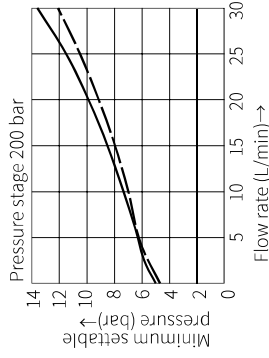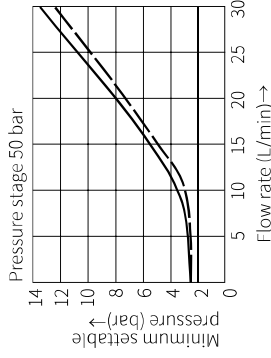


The characteristic curve is measured without back pressure in ports A (external control oil return) and T (internal control oil return). When the internal control oil returns, the pressure in port P or P2 will increase by the outlet pressure value in port T.



Component size

Model DBE, DBEE

Size unit: mm

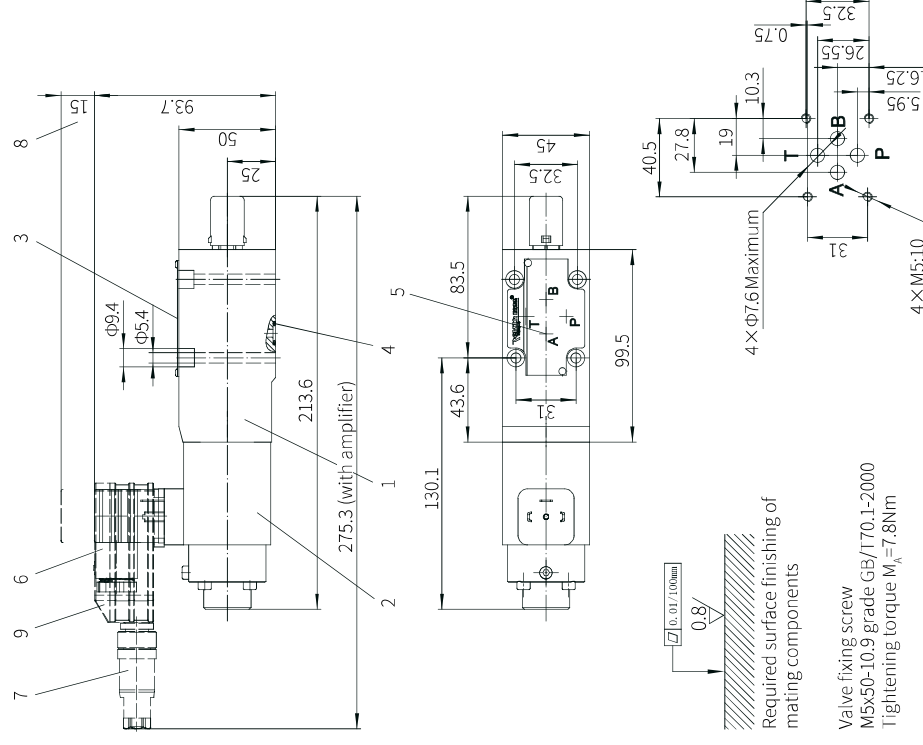



Valve fixing screw
 M5x50-10.9 grade GB/T70.1-2000
 Tightening torque $M_N = 7.8\text{Nm}$

- 1 Valve body
- 2 Proportional solenoid
- 3 Name plate
- 4 Sealing rings for A, B, P, T
- 5 With version Y, pilot oil return external through port A (Y)
- 6 Socket for DBE
- 7 Connector for DBEE
- 8 Space required to remove the plug
- 9 Plug integrated amplifier (DBE)

Component size

Size unit: mm

Model ZDBE, ZDBEE

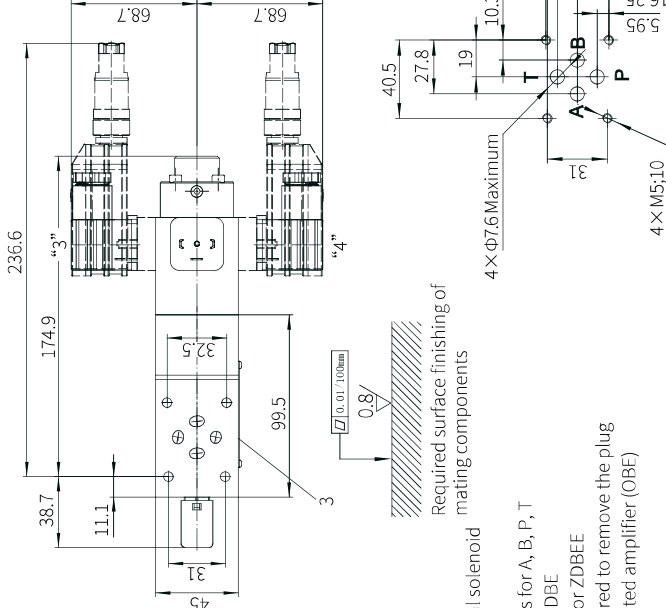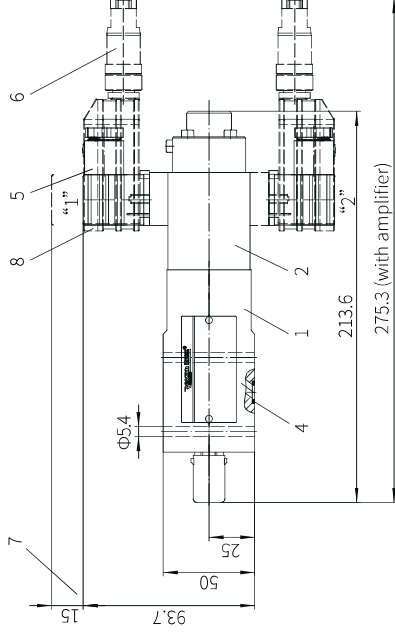

- 1 Valve body
- 2 Proportional solenoid
- 3 Name plate
- 4 Sealing rings for A, B, P, T
- 5 Socket for ZDBE
- 6 Connector for ZDBEE
- 7 Space required to remove the plug
- 8 Plug integrated amplifier (DBE)

Valve fixing screw
M5x50-10.9 grade GB/T70.1-2000
Tightening torque $M_k=7.8\text{Nm}$

Note: "1" to "4" is position for cable sockets or integrated amplifiers

3-Way Proportional Pressure Reducing Valve

Model: 3DREP(E)6...2XJ



- ◆ Size 6
- ◆ Maximum working pressure 100 bar
- ◆ Maximum working flow 15 L/min

Contents

Function description, sectional drawing	02
Functional symbols	03
Models and specifications	03
Technical parameters	04-05
Characteristic curve	05
Component size	06-07

Features

- Direct operated proportional valves for the control of the pressure and direction of a flow
- Operation by proportional solenoid with central thread and detachable coil
- For subplate mounting
- Spring centred control spool
- Model 3DREPE with integrated amplifier
- Model 3DREP with external amplifier
- Manual emergency operation, optional